



EN & ENL



EN & ENL Series

VALVE REGULATED LEAD-ACID BATTERIES

EN & ENL

EN & ENL ENDURANCE VRLA BATTERIES


Suitable for all standby applications including Telecommunications, UPS, Emergency Lighting. Endurance range Batteries from Yuasa are the engineer's choice for even the most critical standby applications, available in 12 year (EN) and 15 year (ENL) models.

FEATURES

- Long Life in standby (12 and 15 year design life options).
- Unique mix and match parallel assembly allows extensive variations to network capacity.
- Electrolyte Suspension. A.G.M. technology assures no free electrolyte to spill or worry about.
- High gas recombination efficiency. Eliminates the need for forced ventilation and separate battery rooms.
- Case Material Oxygen index 30.
- Fully compliant with BS6290-4 and IEC896-2.

Terminal


8mm Stud or Female Internal Thread

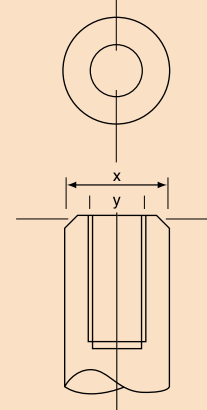

Internal Type

x	y
20mm	M8



Layout

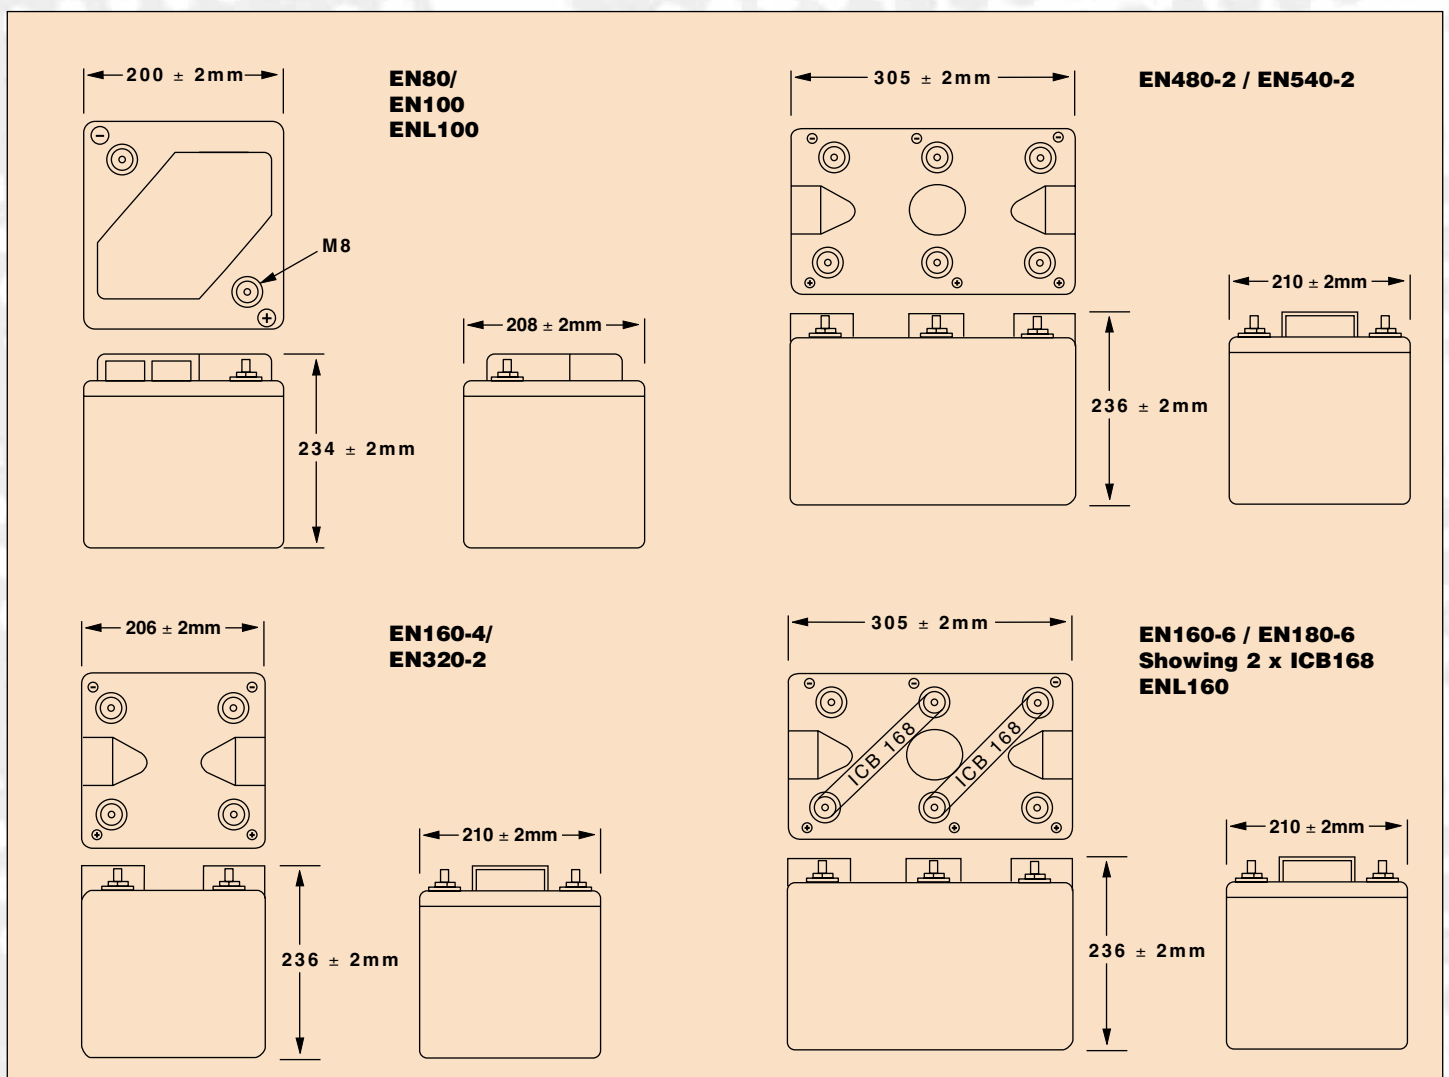

General Specifications

Nominal Capacity (Ah)	EN80-6	EN80-4	EN100-6	ENL100-6	EN100-4	EN160-6	EN180-6	ENL160-6	EN160-4	EN320-2	EN480-2	EN540-2
10hr to 1.85vpc	80	80	100	100	100	160	180	160	160	320	480	540
3hr to 1.80vpc	65	65	81	81	81	129	145	129	129	258	387	435
1 hr to 1.75vpc	53	53	66	66	66	105	118	105	105	210	315	354
Voltage	6	4	6	6	4	6	6	6	4	2	2	2
Energy Density (Wh/L)	49	33	62	69	41	63	71	63	63	63	63	71
Specific Energy (Wh. kg)	20.8	18	26	26	26	27	30	27	27	27	27	30
Impedance (m.ohms)	2.0	1.5	2.0	2.0	1.5	1.5	1.5	1.5	1.2	0.5*	0.5*	0.5*
Max discharge 1 min (A)	480	480	600	600	600	960	960	960	960	1920	2880	2880
Short Circuit (A) EN60896	2222	2000	2222	2035	2000	3235	3235	3200	3009	3852	4157	4157
Dimensions (mm)												
Length	200	200	200	200	200	305	305	305	206	206	206	206
Width	208	208	208	208	208	210	210	210	210	210	210	210
Height overall	238	238	238	234	238	240	240	236	240	240	240	240
Weight (kg)	23	17.5	23	23	17.5	35	38	35	24	24	35	38
Terminal	< 8mm Male Stud >					< Female Insert >						
Terminal Torque (Nm)	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1

* Single cell

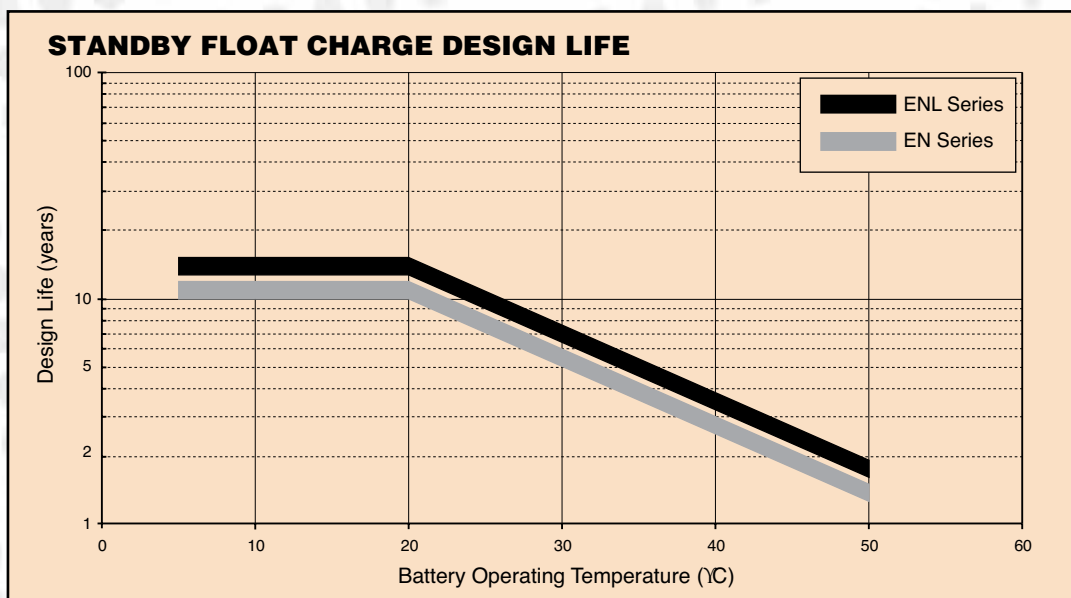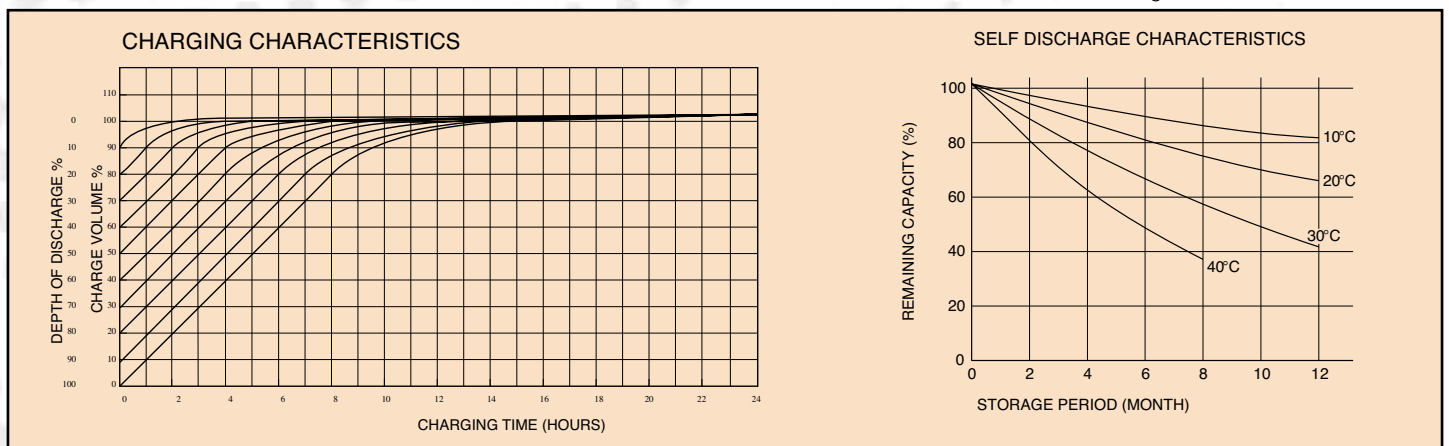


Charging Methods (at 20°C)

Standby use: Float charging voltage $2.26v \pm 0.005v$


CAUTION

- Avoid short circuit.
- Do not charge in a sealed container.

DISCHARGE CHARACTERISTIC CURVES

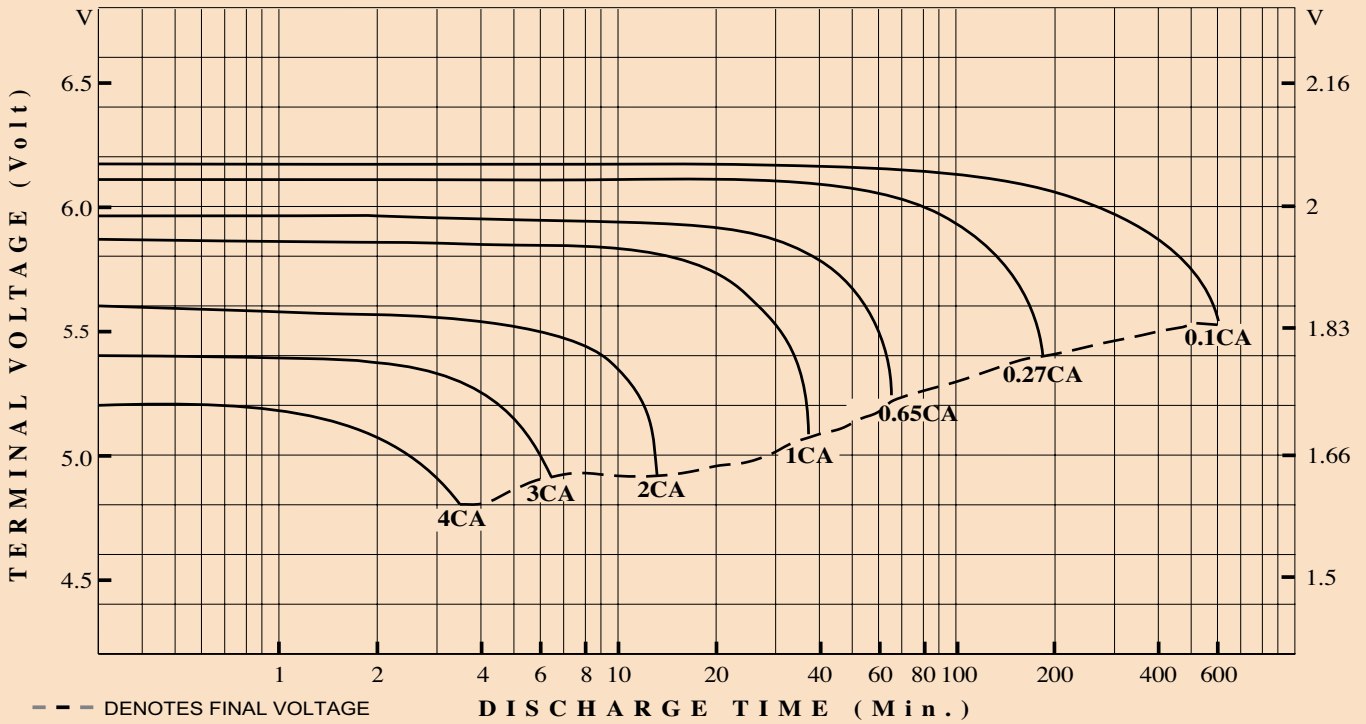

CHARGING CHARACTERISTIC

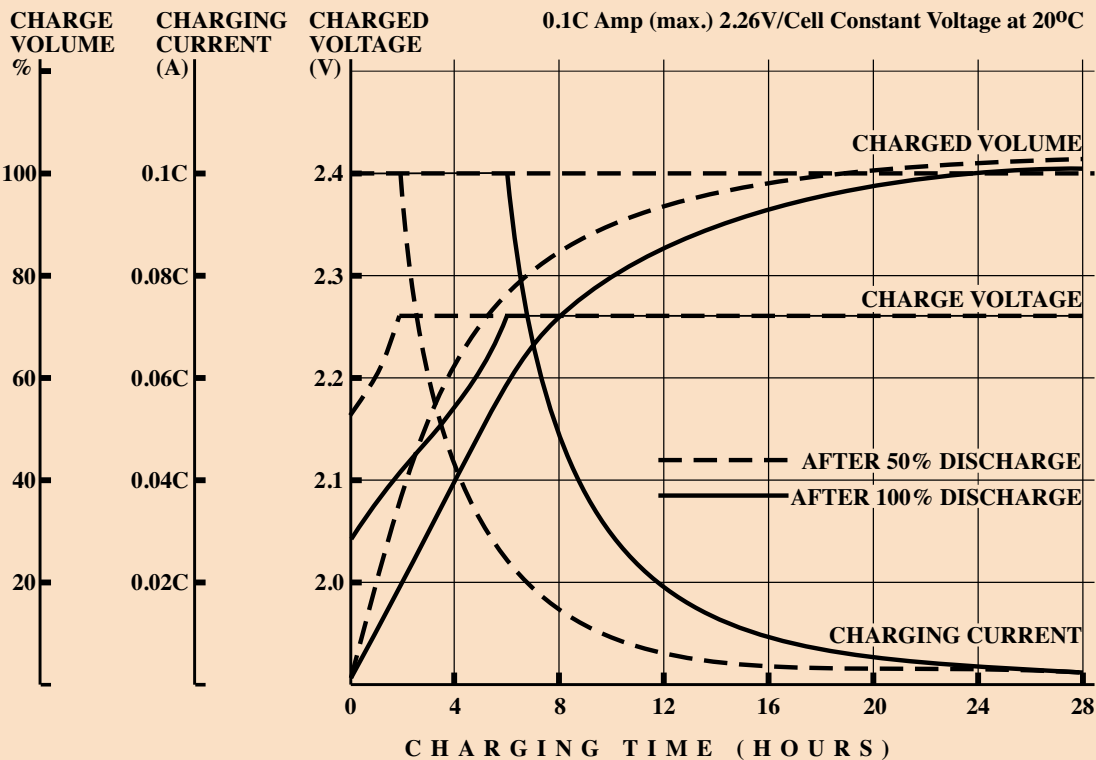

Yuasa Battery Sales (UK) Ltd

Unit 13, Hunts Rise, South Marston Park,
Swindon SN3 4TG

Tel: 01793 833555 Fax: 01793 833579

Email: enquiries@yuasaeurope.com

Registered number 1548820

Cat. No. EVRLASF April 2015

E&O.E.

Distributed by